


SPEARHEAD

MULTICUT 300



MULTICUT 300 FEATURES

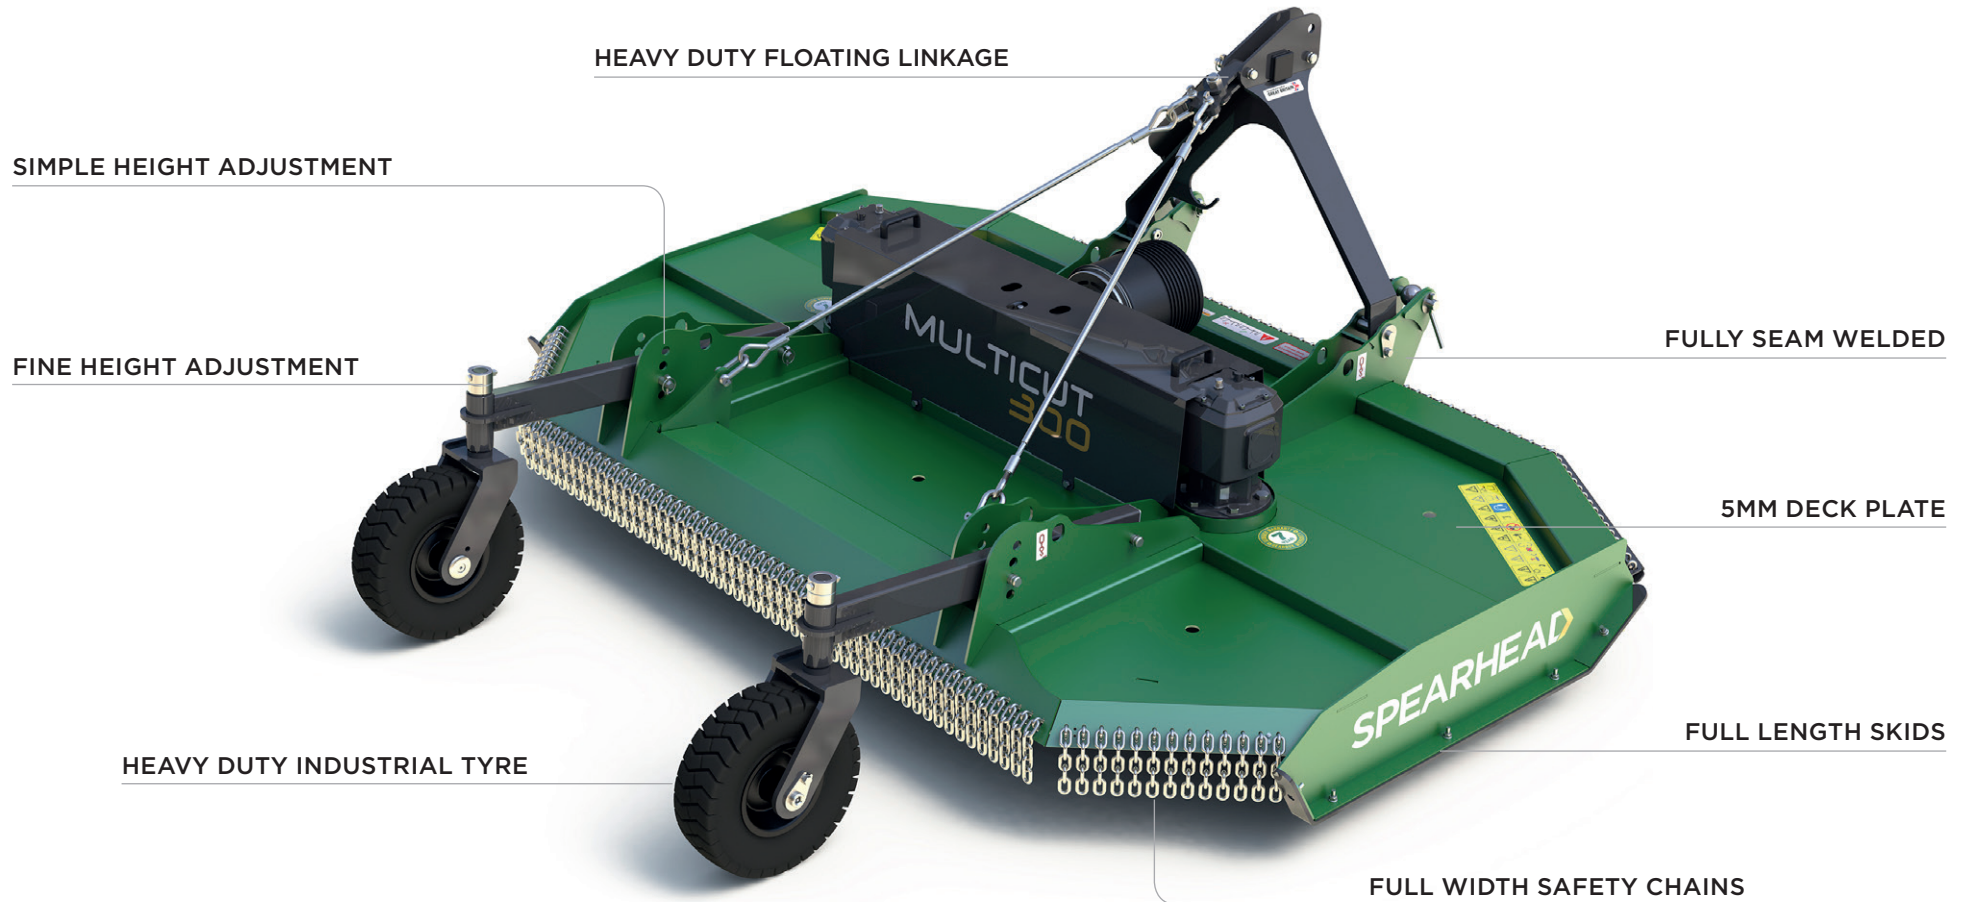

MULTICUT 300

UNIT OPTIONS



50hp



1000rpm



3.03m / 120"



2.84m / 112"



165hp & 130hp



2



2




4



10 - 350mm
0.5" - 14"

MULTICUT 300 A PROFESSIONAL FINISH ON THE ROUGHEST OF TERRAIN

-  AGRICULTURE
-  PASTURE
-  LIGHT SCRUB
-  AIRFIELD
-  STUBBLE MANAGEMENT

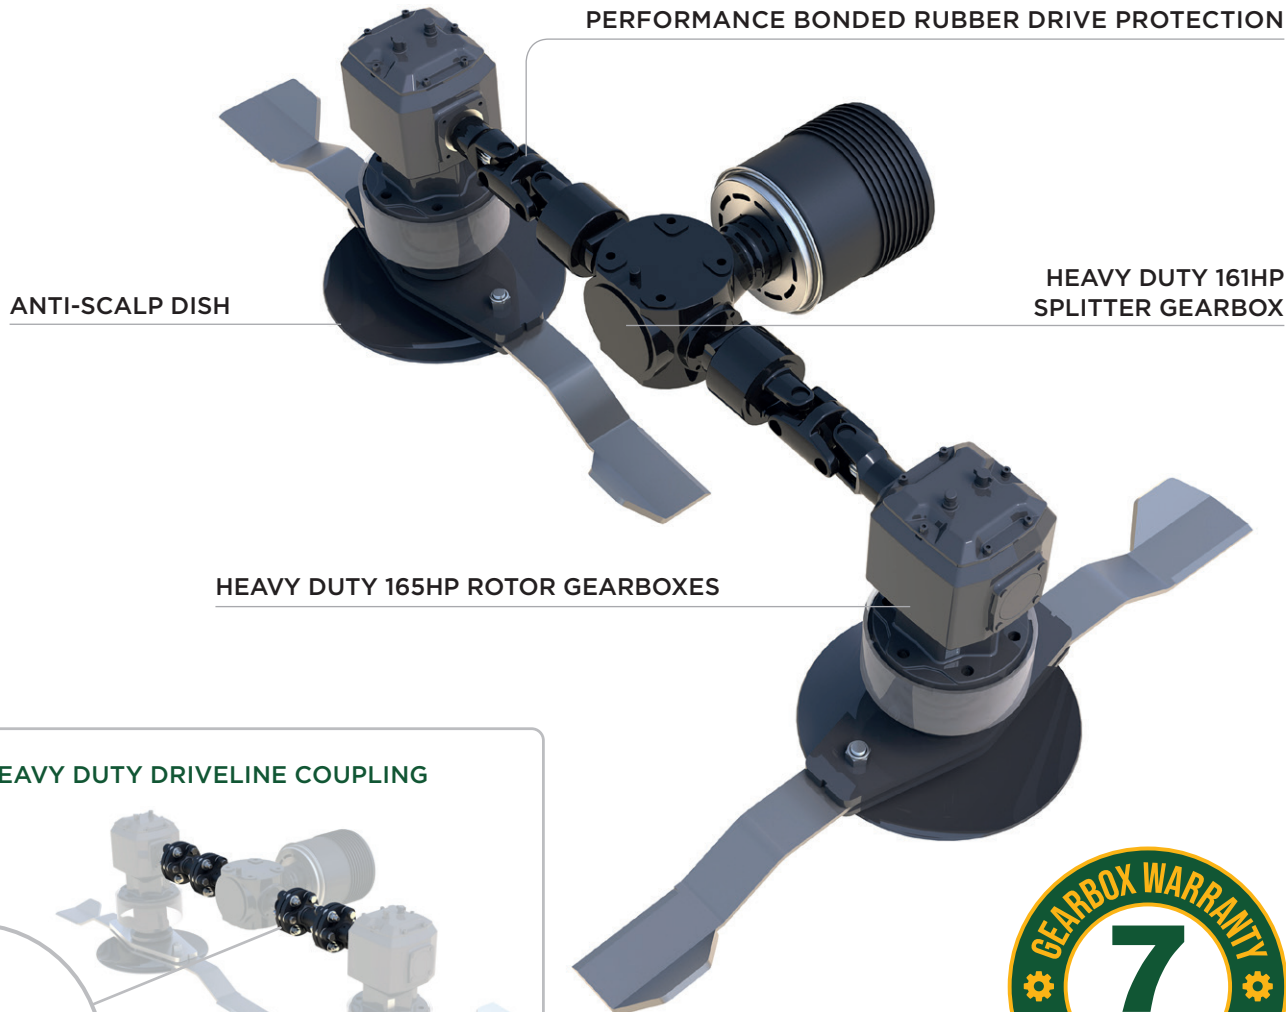

The Multicut 300 is of extremely robust construction, designed and built specifically for the rigorous conditions of set-aside, general mowing and scrub clearance.

The twin rotors, each with massive double blade holders and robust 12 millimetre thick spring steel blades are capable of cutting and mulching scrub up to 100 millimetre thickness.

Like all Spearhead machines the underside of the deck is also important; providing a uniform full width fanned spread of mulched mowings leaving a very professional finish on the roughest of terrain.

The floating linkage combined with the wide full length skids and trailing wheels ensures the machine follows the most uneven ground contours and a special shaft drive system throughout ensures a positive transmission for maximum efficiency and total reliability.

STANDARD SPECIFICATION		MULTICUT 300	
Machine weight*	990kg / 2183lbs	Gearbox oil capacity [rotor gearboxes (x2)]	4.3 litres / 7.6 pints
Hitch	Category 2 with floating clevis top link	Deck construction	All welded construction
Cutting width	2.84m / 112"	Deck material thickness	5mm (3/16")
Overall width	3.03m / 120"	Side skirt material thickness	6mm (1/4")
Overall length	2.73m / 108"	Anti-scalp dish	5mm (3/16") round pan with blade holder bar
Deck height**	0.24m / 10"	Blades (x6)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging high lift - low friction
Cutting height	10mm - 350mm (1/2" - 14")	Blade bolts	M24 C/W shank grade 8.8
Cutting capacity	100mm / 4"	Blade tip speed	85mps / 16734fpm
Recommended tractor HP	50hp / 37kW	Driveline	ASAE Category 4
Power take-off speed	1000rpm	Driveline protection	Automatic torque limiter
Gearboxes (x3)	Cast Iron housing	Tailwheel mount assemblies	Welded box section arm and caster fork with 360 degree swivel
Input shaft	1-3/8" Z6 input shaft	Tailwheels (x2)	5.00-8 rubber tyre with steel rim
Gearbox lubricant [splitter gearbox]	EP80-90W or GL-4 / GL-5 oil	Front guard	Single, two-piece chain guard
Gearbox lubricant [rotor gearboxes (x2)]	85W-140 oil	Rear guard	Single chain guard
Gearbox oil capacity [splitter gearbox]	1.7 litres / 3.0 pints		

* With front and rear single chain guards ** Underside of deck to skid



📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England ☎ +44 (0)1789 491860
 ✉ enquiries@spearheadmachinery.com 🌐 spearheadmachinery.com 🐦 SpearheadWorld



designed and built in
GREAT BRITAIN

