

Tiger™ Attachments



DURABILITY INNOVATION
COMMITMENT



Ditcher

The Boom Ditcher can be mounted in a matter of minutes to the Bengal or Saber Series Booms. The Tiger Ditcher is available as a dedicated tool or as an attachment to the inner or outer boom arms.



Standard cutter head is equipped with three heat treated, self sharpening, replaceable knives and wear plates.



With a 22" diameter cutting width the TIGER ROTARY DITCHER can move approximately 265 cubic yards per hour of material at a steady pace. The hydraulic deflector chute lets you place the spoils where you want them. Available in standard or reverse cutting heads.




Claw

TIGER CLAW PAYS FOR ITSELF

Let the Tiger CLAW help you reclaim lost material from being washed away with its patented* design. The disk gang action of the 22" boron steel disk blades provide the scraping and mulching action to pull and recover lost shoulder material from the ditch.

Whether you are working on a hard surface or a gravel road, the Tiger CLAW can quickly repair and contour miles of road shoulder in a day. Calculate your savings with the formula listed below, and see how the Tiger CLAW quickly pays for itself.

The CLAW attaches to the tractor's category II three-point hitch system. A single set of hydraulic remotes on the tractor are needed for positioning the tilt angle of the CLAW in order to match the slope of the road shoulder.

Built for years of service, a heavy-duty steel frame holds the CLAW's disk gang in line. Twelve disks are spaced evenly along the 2.25" diameter steel shaft and secured with two 2.25" - 4 bolt pillow block bearings designed to handle the end thrust pressure.



Patented angle design effectively moves and mulches 37" of material.

Let the Tiger CLAW retrieve your savings!

*U.S. PATENT NO'S 5,108,227 & Re. 34,860 CDN PATENT NO. 2,029,695



TRANSPORTING

For transport, CLAW manually folds to rear of tractor and is secured with a transport lock.



TOPLINK

Hydraulic toplinek positions the working angle of the Claw.



UNIVERSAL CLAW (Option)

Designed for working on Left hand and Right hand road shoulders.



HYDRAULIC TRANSPORT (Option)

Allows the operator to easily move the disk gang out of the way of approaching obstacles. (Dual SCV's required.)

Calculate your CLAW return on investment with the following formula.

depth	x	width	x	constant	=	cubic/yards/mile	x	cost/yard	=	value of gravel/mile reclaimed
example 1"	x	37"	x	1.3555	=	50.154	x	\$11.00	=	\$551.69
_____	x	_____	x	1.3555	=	_____	x	_____	=	_____



TigerTM Snow Panther

Convert your Tiger Boom Mower into a versatile and powerful snow blowing machine with the Snow Panther. With the innovative patent pending design, it allows you to clear snow from hard to reach areas that ordinary front or rear snow blowers are not made to handle. When attached to the end of your Tiger boom, the Snow Panther gives the operator the ability to remove large snow piles from guardrails, roadsides, sidewalks and fire hydrants quick and easy.



Tiger's Snow Panther can also be mounted to the Truckat, changing a very mobile boom mowing machine into a snow blower in a matter of minutes. Make the most out of your truck or tractor with the full line of Tiger attachments designed for your changing needs. Call your TIGER dealer today.



SNOW PANTHER SPECIFICATIONS

Cutter Width 55"
Cutter Height 29"
Overall Height 65"

Auger Diameter 16"
Fan Diameter 20"
Weight 740 lbs.

Fan is Four (4) paddle design. Hydraulic power supply for fan and feed auger. Deflector, hydraulic actuated 270°. Hydraulic adjustable discharge chute.

Delivery system is replaceable, high carbon steel cutter blade. Hydraulic motor rated at 930 lbs. of maximum intermittent torque. Adaptable to any Heavy Duty Tiger Boom Mower, (Truckat or Tractor mounted).



WWW.TIGERMOWERS.COM

TigerTM Snow Plow

SNOW PLOW and PATROL WING

Attach a Tiger Snow Plow to an existing approved Tiger Mower mount system and be ready for old man winter. The 11' moldboard front plow features a front blade equipped with plasma cut steel ribs and six (6) tension trip springs. Add the 8' Patrol Wing for additional plowing width. The Patrol Wing features a full moldboard trip with high impact rubber shock absorber that attaches to the mower mounting system and the tractor Category II 3 point hitch system.



Snow Plow

- 30" Blade Height constructed from 10 mm steel
- 3" x 4" Tubular Steel Push Beam
- Dual Cylinders for Angling
- Single Lift Cylinder
- AASHTO punched 1/2" thick cutting edges


Patrol Wing

- Moldboard constructed from 10 mm steel
- 6 - 3/8" thick plasma cut steel ribs
- Single telescoping pushbar with spring cushion and sheer pin
- Inboard and Outboard adjustment controlled by hydraulics
- AASHTO punched 1/2" thick cutting edges

For additional hydraulic outlets ask about the Tiger valve multiplier kits, converts one set of tractor SCV's into 2-3-4 dual outlets. For additional features and specifications, please contact your Tiger Dealer.



Dual Cylinders built for Angling Plow.



Optional - Valve Multiplier Kit



Inboard and Outboard adjustment controlled by hydraulics.



8' Patrol wing can come separate or mounted with Snow Plow.




WWW.TIGERMOWERS.COM



Sweeper

The Tiger 8' Sweeper attachment mounts to the front of your tractor and allows debris to be swept away quickly and easily. The Heavy Duty brush is constructed of 50% Poly and 50% wafer core. The sweeper drive is powered by two hydraulic motors and features hydraulic lift and angle control.

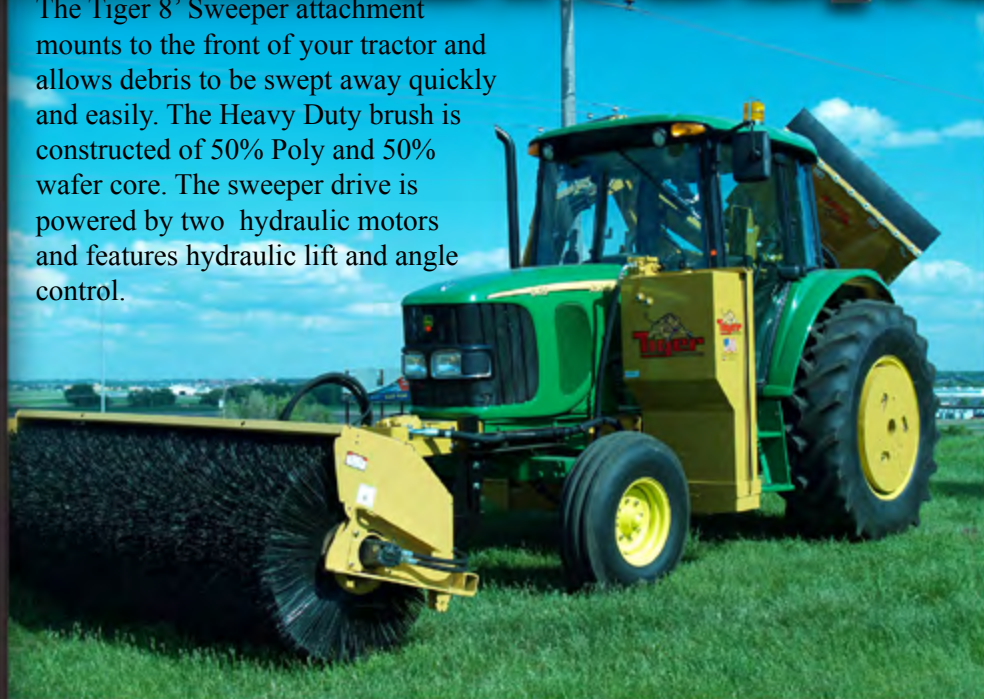

Tiger has the 5' Boom Sweeper that attaches to both the Bengal and Saber Booms.



Sweepers in 10' and 12' lengths

Saw Blade

The Tiger 48" Saw Blade Attachment is designed and engineered to provide a smooth cut in trees limbs. This design makes a difference to our customers when aesthetics and thrown material are a concern. The Saw Blade can be mounted on both the Bengal and Saber Series 50" Rotary Cutters. The Saw Blade comes standard with replaceable carbide tipped teeth.



48" Saw Blade Attachment with reinforced center for added blade strength. Tiger Bengal series 50" Rotary mower shown.




Cuts up to 6" tree limbs with Bengal Series
Cuts up to 8" tree limbs with Saber Series



WWW.TIGERMOWERS.COM



WetCut



Spray Chamber attaches to Boom Flail Cutter Head.



Offset Sprayer can reach weeds up to 14 feet from the right of the mower deck.




Spray Chamber can also attach to boom Rotary cutter head.



50, 100 & 150 gallon Tank mix systems are available for the tractor 3 PT hitch.

With a single flip of a switch, the WetCut Computer controlled system accurately applies the target rate. The digital display keeps the operator informed on the vehicle speed, system pressure and the GPA (gallons per acre) being applied.

WETCUT SYSTEM DIAGRAM

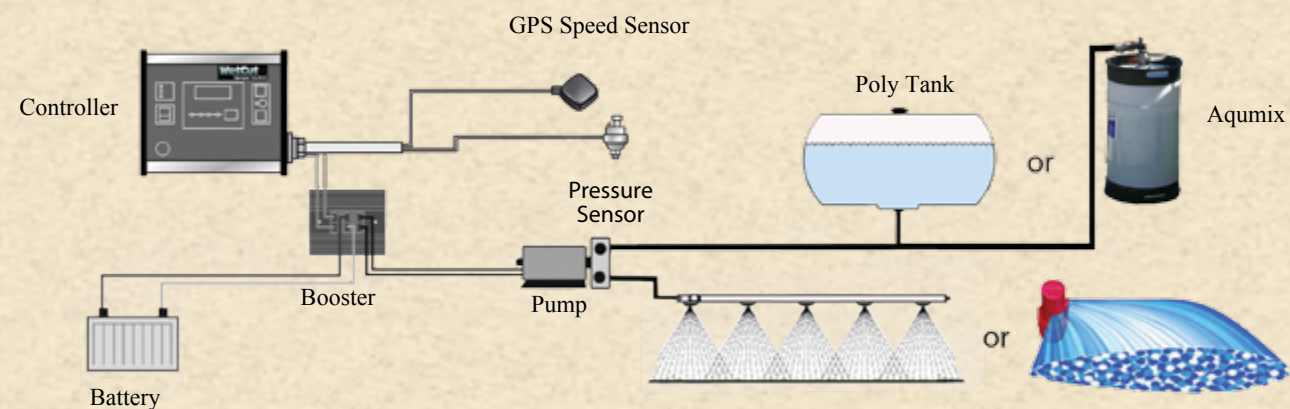

- Delivery system consists of a 12 volt positive displacement pump controlled by an automatic rate control system with a pressure sensor and GPS speed sensor.
- Available with three different poly tank sizes or with the Aquamix System.
- Spray controller provides a digital read out of the application rate, system pressure and the vehicle miles per hour. Chemicals are applied through a fixed zone spray chamber or single offset nozzle.
- Ideal for applicators who want the precision of computerized rate control with the flip of a switch.
- Also available as an option is the Rheostat Control system.

LET TIGER'S PROVEN DESIGNS HELP YOU CONTROL COSTS BY PROVIDING BETTER AND MORE TIMELY CONTROL OF UNDESIRABLE VEGETATION.



WWW.TIGERMOWERS.COM

