Triple Threat Triple Flail Mower

INNOVATIONS ON THE MOVE

The power to cut through large swaths of grass...the performance necessary to tackle your toughest mowing areas and built with the strength to last. Get it all with Tiger's Triple Pull Flail mower.


With 50 years of commitment, giving our customers the best built mowing products on the market, Tiger has designed a hydraulic driven triple flail pull mower that is completely self-contained. Each mower can operate independently or a combination of any of the 3 mowing heads simultaneously.

Great for wide area and airport mowing, the versatility of this innovative machine allows you to tackle your toughest mowing projects quickly and then simply disconnect the mower and use your tractor for other demanding jobs.



DURABILITY INNOVATION

COMMITMENT



Tiger's Triple Pull Flail Mower, built to give you more power with ease of operation.

er-ecitures

14 function keypad in tractor gives accurate control of complete mowing system with the simple push of a button.

Designed to attach to any 1000 PTO tractor with easy battery hookup for power.

Extreme duty flail mowers can handle grass and brush up to 1" in diameter and boasts a cut path of over 18'8".



LEGAL WIDTH AND ROAD READY



QUICK DISCONNECT DRAWBAR HITCH

CONTROL KEYPAD





COMPLITERIZED **COOLING FAN**



Developed to handle today's mowing challenges with quick disconnects for easy detachment and built with your transportation needs in mind. When mowers are up and locked, unit is legal width, ready to travel safely from job site to job site . Tiger Extreme Duty Flails are designed and built to meet and exceed ANSI and SAE standards.

Minimum Tractor Requirements


Horse Power **PTO required Drawbar weight** 85 HP PTO Minimum 1000 PTO 1675 lbs.

Features


Hydraulic System 50 gallon tank with integrated sight glass Quad Pump System 3 - 27 gpm pumps, one for each flail

Safety Stop **Cutter Heads Cut Diameter Cutting Height Cutter Knife Cutter Shaft Tilt Switch** Weight

1 - 12 gpm pump for all 5 cylinder functions 7 Second Shut Down 75" side flails, 90" rear flail 1" grass or brush 1/2" to 6" Forged Heavy Duty Extreme Duty flail type, 6" diameter Adjustable shut off from 0° to 90°, side heads 7450 lbs.



CORPORATION

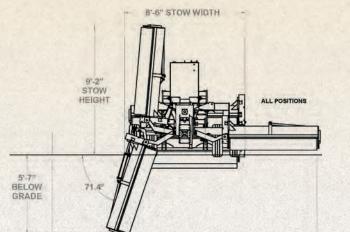

18'-8 1/2" CUT





Tiger Corporation 3301 North Louise Ave. Sioux Falls, SD, USA 57107 800.843.6849 www.tigermowers.com

An Alamo Group[®] Company Specifications are subject to change. Optional equipment may be shown.

Meets All Applicable ANSI / SAE Test Standards. © 2018 Tiger Corporation. All Rights Reserved. Printed in the USA.

